

DanSolar
 Bautavej 1a
 8210 Aarhus V
 Denmark
 Phone 0045 8744 1118



PRO-LINE3000

Cells

Cell Technology	Monocrystalline
Number of cells per module	96pcs
Cell Type	125 x 125 mm

Electrical Data

PRO-LINE2000

Maximum power	260W
Open circuit voltage (V):	57.6V
Max. power voltage (V):	48.0V
Short circuit current (A)	5.7A
Max. power current (A):	5.41A

* At Standard Test Conditions(STC) Irradiance 1000Watt/m², AM1.5 100mW/cm² 25°C


Thermal Data

Temperature coefficients of Voc (%)	-0.38/ °C
Temperature coefficients of Isc (%)	+0.1/ °C
Temperature coefficients of Pm (%)	-0.47/ °C
Temperature Range	-40°C ~ +85°C

Additional Data

Junction box type	(TUV)
Cable type	(TUV)
Output tolerance	0 to +5%
Frame material, BLACK	Anodized aluminium
Front glass	3.2mm tempered glass
Module Efficiency	18.0%

Module Construction

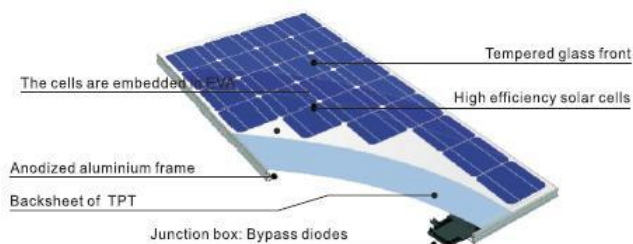

Mechanical Data

Dimension of solar module	1559 x 1046 x 45mm
Weight	21.0KGS

Product Picture



Warranty

10 years Full warranty on the Material and workmanship, and a performance warranty of 90% of the minimal rated power output during the first ten (10) years and 80% during twenty-five (25) years

Key Feature

Maximum surface load capacity

60 m/s (200 kg/m²)